



Electric Airless Sprayers

The Industry's First Choice for Electric Airless Sprayers.



PROVEN QUALITY. LEADING TECHNOLOGY.

Electric Sprayers



The Industry's First Choice
for Electric Airless Sprayers



390

Ultra® 395

Ultra Max II 490

Ultra Max II 495

Ultra Max II 595

Ultra Max II 695

Ultra Max II 795

Ultra Max II 1095

Mark V™

FinishPro™ 390

FinishPro 395

Only Graco® delivers the industry's first choice for electric airless sprayers, backed by a solid reputation for proven quality, maximum performance, reliable warranty coverage and unmatched on-the-job productivity.

Graco sprayers are designed to exceed the professional painting contractor's standards for quality and performance. Graco is the name to turn to today and as your business grows.



**We Stand Behind the Quality
Built Into Every Product**



Proven Quality

- Precision design, 100% factory-tested, and field-proven.
- Cutting-edge technology keeps Graco sprayers up and running and on the job for years.

Maximum Performance

- Higher output with superior control ensures highest quality finish for every job.
- Rely on any of these high performance sprayers to deliver the results you expect from a Graco.

Industry Leading Warranty

- Every Graco electric sprayer is backed by our full warranty coverage and more than 80 years of proven commitment to the professional contractor.
- Sprayers so reliable you may never need to use the warranty.

Unmatched Productivity

- Exclusive Endurance™ Pumps deliver long life, reliable performance, and consistent spraying.

390

Now with Higher Performance!



The 390 is a solid workhorse built for the professional just “starting out”. Lightweight and portable, the 390 is the ideal sprayer for residential jobs, and is the best value in small electric sprayers.

Lightweight Design

- Graco’s lightest professional sprayer at only 13.6 kg
- Easy to lift and carry

Proven Endurance™ Pump

- Long-life V-Max™ Packings, Chromex™ Rod and Hardened Stainless Steel Cylinder
- Proven design and rugged construction
- QuikAccess intake valve to easily clean or clear debris

Consistent Pressure Control

- Simple mechanical design for years of reliable use
- Double-seal design keeps moving parts isolated from paint
- Delivers quality spray pattern with minimal fluctuation

Reliable DC Motor

- Allows you to run long extension cords, up to 90 m (14 gauge min.)
- Quiet and reliable

Swivel Inlet Suction Hose

- All aluminum construction is durable, lightweight, and rust free
- No-tools removal of hose for cleaning or accessing inlet ball
- Easily swivels to reach buckets or cans
- Stands upright so it won’t tip cans over

Welded Steel Frame

- Welded steel cord wrap doubles as a chain “lock down”
- Four-leg design for solid footing plus rugged leg caps to protect floor
- Offset handle for comfortable carrying

Easy Out™ Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out – so filters won’t get stuck or collapse when dirty
- Filter removes with the cap for less mess

DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX LPM	MAX PSI
390	254998	.021	1.8	3300

Comes complete with: New FTx™ Gun, RAC™ X 515 Tip and Guard, 6.4 mm x 15 m BlueMax™ II Hose.



New Easy Out Filter with 52 cm² of filtering area.



New offset handle is positioned to kick sprayer away from leg while carrying.



New QuikAccess™ intake requires only a hammer to access the intake ball.

The Ultra 395's reliability and performance has made it Graco's most popular small electric sprayer. Proven technology and design make it perfect for professionals who spray daily with a wide range of coatings.

Proven Endurance Pump

- Long-life V-Max Blue Packings, Chromex Rod, and Hardened Stainless Steel cylinder
- QuikAccess intake valve to easily clean or clear debris

SmartControl™ 1.0 Pressure Control

- Microprocessor control delivers a consistent spray fan without pressure fluctuation at all spraying pressures
- Tight deadband and fast response when spraying

Totally Enclosed DC Motor

- Enclosed design protects internal motor components from dirt, dust, and overspray to extend motor life

Swivel Inlet Suction Hose

- All aluminum construction is durable, lightweight, and rust free
- No-tools removal of hose for cleaning or accessing inlet ball
- Easily swivels to reach buckets or cans
- Stands upright so it won't tip cans over
- Big Cup holds the inlet during transport to catch drips

Welded Steel Frame

- Rugged four-leg design for solid footing plus rugged leg caps to protect floor
- Offset handle with rubber comfort grip provides comfortable carrying
- Welded steel cord wrap doubles as a chain "lock down"
- Choose Stand, Hi-Boy or Lo-Boy cart

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out – so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess

Ultra 395

Now with Higher Performance!



DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX LPM	MAX PSI
Ultra 395 Stand	234180	.023	2.0	3300

Comes complete with: New FTx Gun, RAC X 515 Tip and Guard, 6.4 mm x 15 m BlueMax II Hose.



Offset handle for comfortable carrying.



Easy Out pump filter removes simply with the cap.



QuikAccess intake requires only a hammer to access the intake ball.

Ultra Max II 490

Now with Higher Performance!



The new Ultra Max II 490 brings the leading technology and performance of Graco's larger Ultra Max II models into these compact and lightweight sprayers. The 490 is the best choice for professionals looking for superior performance and control for daily use on residential jobs.

Proven Endurance Pump

- Long-life V-Max Blue Packings, Chromex Rod, and Hardened Stainless Steel cylinder
- QuikAccess intake valve to easily clean or clear debris

Lightweight Design

- Weighs only 19 kg
- Easy to carry

Exclusive Brushless DC Motor

- Compact, lightweight motor delivers higher horsepower per wall amp
- No brushes to replace
- Enclosed design protects internal motor components from dirt, dust and overspray to extend motor life

SmartControl 2.0 Pressure Control

- Advanced microprocessor control delivers most consistent spray fan at all spraying pressures
- Zero deadband at lower spraying pressures makes the 490 ideal for fine finish spraying

Swivel Inlet Suction Hose

- All aluminum construction is durable, lightweight, and rust-free
- No-tools removal of hose for cleaning or accessing inlet ball
- Easily swivels to reach buckets or cans
- Stands upright so it won't tip cans over

Welded Steel Frame

- Offset handle with rubber comfort grip provides comfortable carrying
- Welded steel cord wrap doubles as a chain "lock down"
- Choose Stand, Hi-Boy or Lo-Boy cart

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out so filters won't get stuck or collapse
- Filter removes with the cap for less mess

DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX LPM	MAX PSI
Ultra Max II 490 Stand	249932	.023	2.0	3300

Comes complete with: New FTx Gun, RAC X 515 Tip and Guard, 6.4 mm x 15 m BlueMax II Hose.



No tools suction hose removal.



Easy Out filters won't collapse or get stuck when dirty.



Offset handle for comfortable carrying.

The new Ultra Max II 495 features the leading technology and performance of Graco's larger Ultra Max II models. The Ultra Max II 495 is the sprayer of choice for professionals who need a higher output sprayer for daily use on residential jobs.

Proven Endurance Pump

- Long-life V-Max Blue Packings, Chromex Rod, and Hardened Stainless Steel cylinder
- QuikAccess intake valve to easily clean or clear debris

SmartControl 2.0 Pressure Control

- Advanced microprocessor control delivers Graco's most consistent spray fan at all spraying pressures
- Zero deadband at lower spraying pressures makes the 495 ideal for fine finish spraying

Exclusive Brushless DC Motor

- Compact, lightweight motor delivers higher horsepower per wall amp
- No brushes to replace
- Enclosed design protects internal motor components from dirt, dust and overspray to extend motor life

Chrome Plated, Welded Steel Hi-Boy cart

- Thick chrome over steel to withstand rugged environments
- Retractable handle doubles as a hose wrap
- TiltBack™ cart design
- Semi-pneumatic wheels roll easily over rough terrain

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out – so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess

Ultra Max II 495

Now with Higher Performance!



Hi-Boy Unit Shown

DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX LPM	MAX PSI
Ultra Max II 495 Stand	249933	.025	2.3	3300
Ultra Max II 495 Hi-Boy	253105	.025	2.3	3300
Ultra Max II 495 Lo-Boy	253104	.025	2.3	3300

Comes complete with: New FTx Gun, RAC X 515 Tip and Guard, 6.4 mm x 15 m BlueMax II Hose.



Lo-Boy pail hook for easy bucket movement.



QuikAccess intake requires only a hammer to access the intake ball.



TiltBack cart design.

Ultra Max II 595

Now with Higher Performance!

The Ultra Max II 595 is a workhorse. It's proven to be a hit with contractors who are looking for higher output and professional features, in a compact and portable sprayer.

Proven Endurance Pump

- Long-life V-Max Blue Packings, Chromex Rod, and Hardened Stainless Steel cylinder
- QuikAccess intake valve to easily clean or clear debris

SmartControl 2.0 Pressure Control

- Advanced microprocessor control delivers Graco's most consistent spray fan available at all spraying pressures
- Zero deadband at lower spraying pressures – ideally suited for fine finish spraying

Exclusive Brushless DC Motor

- Compact, lightweight motor delivers higher horsepower per wall amp
- No brushes to replace
- Enclosed design protects internal motor components from dirt, dust, and overspray to extend motor life

Chrome Plated, Welded Steel Lo-Boy Cart

- Low profile, compact design transports easily in tight spaces
- Retractable handle allows sprayer to roll comfortably behind you
- Integrated hose wrap and pail hook for ultimate portability

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out – so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess

Swivel Inlet Suction Hose

- All aluminum construction is durable, lightweight, and rust-free
- No-tools removal of hose for cleaning or accessing inlet ball
- Easily swivels to reach buckets or cans
- Stands upright so it won't tip cans over



Lo-Boy Unit Shown

DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX LPM	MAX PSI
Ultra Max II 595 Hi-Boy	249934	.027	2.6	3300
Ultra Max II 595 Lo-Boy	253107	.027	2.6	3300

Comes complete with: New FTx Gun, RAC X 515 Tip and Guard, 6.4 mm x 15 m BlueMax II Hose.



TiltBack cart design (Hi-boy shown).



Inlet tube removes by hand for easy clean up.



Retractable handle for simple removal of coiled hose.

The Ultra Max II 695 is the industry standard for professional contractors who spray a full range of coatings on residential, commercial and industrial jobs. The Ultra Max II 695 handles the most common tip sizes, longer hose lengths and heavier coatings with ease.

Proven Endurance Pump

- Larger fluid passages handle heavier coatings with ease
- Long-life V-Max Blue Packings, Chromex Rod, and Hardened Stainless Steel cylinder
- QuikAccess intake valve to easily clean or clear debris
- Hand removable inlet tube

SmartControl 2.0 Pressure Control

- Advanced microprocessor control delivers Graco's most consistent spray fan at all spraying pressures
 - Zero deadband at lower spraying pressures makes the 695 ideal for fine finish spraying
- WatchDog™ system automatically shuts off sprayer when bucket is empty to prevent damage

Exclusive Brushless DC Motor

- Compact, lightweight motor delivers higher horsepower per wall amp
- No brushes to replace
- Enclosed design protects internal motor components from dirt, dust and overspray to extend motor life

Chrome Plated, Welded Steel Hi-Boy cart

- Retractable handle system doubles as a hose wrap
- TiltBack cart design
- Lift handles offer convenient grab points
- Welded steel power cord wrap
- Tubed pneumatic wheels roll easily on all surfaces

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out – so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess

Ultra Max II 695 Hi-Boy

Now with Higher Performance!



DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX LPM	MAX PSI
Ultra Max II 695 Hi-Boy	249685	.029	3.0	3300

Comes complete with Digital Display, AutoClean2™, Toolbox, and New Contractor Gun, 6.4 mm x 15 m BlueMax II Airless Hose, RAC X 517 Tip and Guard



QuikAccess intake requires only a hammer to access the intake ball.



Digital display with pressure readout, job/lifetime counters, and AutoClean2 timer.



WatchDog Pump Protection System prevents dry pumping damage.

Ultra Max II 695 Lo-Boy

Now with Higher Performance!



The Ultra Max II 695 is also available in a compact Lo-Boy cart model for improved portability. Perfect for professional contractors who spray a full range of coatings on residential, commercial and industrial jobs.

Proven Endurance Pump

- Larger fluid passages handle heavier coatings with ease
- Long-life V-Max Blue Packings, Chromex Rod and Hardened Stainless Steel cylinder
- QuikAccess intake valve to easily clean or clear debris
- Hand removable inlet suction hose

SmartControl 2.0 Pressure Control

- Advanced microprocessor control delivers Graco's most consistent spray fan at all spraying pressures
- Zero deadband at lower spraying pressures makes the 695 ideal for fine finish spraying
- WatchDog system automatically shuts off sprayer when bucket is empty to prevent damage

Exclusive Brushless DC Motor

- Compact, lightweight motor delivers higher horsepower per wall amp
- No brushes to replace
- Enclosed design protects internal motor components from dirt, dust and overspray to extend motor life

Chrome Plated, Welded Steel Lo-Boy Cart

- Rugged welded steel construction
- Retractable handle allows sprayer to roll comfortably behind you
- Tubed pneumatic wheels roll easily on all surfaces
- Integrated hose wrap and pail hook for ultimate portability

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out – so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess

DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX LPM	MAX PSI
Ultra Max II 695 Lo-Boy	255139	.029	3.0	3300

Comes complete with Digital Display, AutoClean2, Toolbox, and New Contractor Gun, 6.4 mm x 15 m BlueMax II Airless Hose, RAC X 517 Tip and Guard



Swivel inlet suction hose.



QuikAccess intake requires only a hammer to access the intake ball.



Watchdog Pump Protection System prevents dry pumping damage.

The Ultra Max II 795 is ideal for one gun and occasional two gun spraying on residential, commercial and industrial jobs. Its higher output delivers consistent performance with larger tips and longer hoses spraying heavier coatings.

Proven Endurance Pump

- Larger fluid passages handle heavier coatings with ease
- Long-life V-Max Blue Packings, Chromex Rod, and Hardened Stainless Steel cylinder
- QuikAccess intake valve to easily clean or clear debris
- Hand removable inlet tube

SmartControl 2.0 Pressure Control

- Advanced microprocessor control delivers Graco's most consistent spray fan at all spraying pressures
 - Zero deadband at lower spraying pressures makes the 795 ideal for fine finish spraying
- WatchDog system automatically shuts off sprayer when bucket is empty to prevent damage

Exclusive Brushless DC Motor

- Compact, lightweight motor delivers higher horsepower per wall amp
- No brushes to replace
- Enclosed design protects internal motor components from dirt, dust and overspray to extend motor life

Chrome Plated, Welded Steel Hi-Boy Cart

- Rugged welded steel construction
- Integrated hose wrap with retractable handle
- TiltBack cart design
- Lift handles offer convenient grab points
- Welded steel power cord wrap
- Tubed pneumatic wheels roll easily on all surfaces

(795 also available in Lo-Boy version, see 695 Lo-Boy on previous page for Lo-Boy cart features.)

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out – so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess

Ultra Max II 795



Hi-Boy Unit Shown

DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX LPM	MAX PSI
Ultra Max II 795 Hi-Boy	249687	.031-1 gun, .023-2 guns	3.6	3300
Ultra Max II 795 Lo-Boy	255140	.031-1 gun, .023-2 guns	3.6	3300

Comes complete with Digital Display, AutoClean2, Toolbox, and New Contractor Gun, 6.4 mm x 15 m BlueMax II Airless Hose, RAC X 517 Tip and Guard



Hand removable inlet tube.



Brushless DC motor with Lifetime Warranty.



Watchdog Pump Protection System prevents dry pumping damage.

Ultra Max II 1095



Premium Unit Shown

The Ultra Max II 1095 is ideal for commercial and industrial contractors who routinely spray with multiple guns, long hoses and the toughest coatings. High output and reliable performance make the Ultra Max II 1095 the choice of large professional contractors worldwide.

Proven Endurance Pump

- Exclusive ProConnect™ system allows quick change-out of pumps – no tools required
- Long-life V-Max Blue Packings, Chromex Rod, and Hardened Stainless Steel cylinder
- QuikAccess intake valve to easily clean or clear debris

SmartControl 2.0 Pressure Control

- Advanced microprocessor control delivers Graco's most consistent spray fan at all spraying pressures
- Zero deadband at lower spraying pressures makes the 1095 ideal for fine finish spraying
- WatchDog system automatically shuts off sprayer when bucket is empty to prevent damage

Exclusive Brushless DC Motor

- Compact, lightweight motor delivers higher horsepower per wall amp
- No brushes to replace
- Enclosed design protects internal motor components from dirt, dust and overspray to extend motor life

Chrome Plated, Welded Steel Hi-Boy Cart

- Hose wrap with retractable handle
- TiltBack cart design
- Lift handles offer convenient grab points
- Tubed pneumatic wheels roll easily on all surfaces

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out – so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess

DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX LPM	MAX PSI
Ultra Max II 1095 Hi-Boy	249688	.033–1 gun, .025–2 guns, .019–3 guns	4.1	3300

Comes complete with Digital Display, AutoClean2™, Toolbox, and New Contractor Gun, 6.4 mm x 15 m BlueMax II Airless Hose, RAC X 517 Tip and Guard



Brushless DC motor with totally enclosed design.



Exclusive ProConnect System - no-tools pump removal for fast repairs on the job.



Watchdog Pump Protection System prevents dry pumping damage.



The Mark V is Graco's largest electric airless/texture sprayer. Its job-proven texture capabilities enable it to spray skim coat in a Level 5 finish, and drywall mud in an orange peel, splatter, or knockdown finish. It can even airless spray a wide range of primers and paints.

Proven Endurance Pump

- Oversized clearances ensure minimal pressure drop and surge-free performance
- Long-life Chromex Pump Rod and V-Max Blue Packings

Specially Designed, Submerged Foot Valve

- Uniquely designed with Max Flo™ fluid passages and large ball check to efficiently load thick and heavy materials
- Foot valve is placed low to the ground, submerging it in the material bucket

Exclusive ProConnect™ System

- No-tools removal and installation for fast repairs, right on the job
- No-tool paint line connection

SmartControl 2.0 Pressure Control

- Precise spray-pressure control through the full range – from 400 psi to 3300 psi
- Higher spray pressures give you the power to spray tough coatings and run long hose lengths

Exclusive Brushless DC Motor

- Compact, lightweight motor delivers higher horsepower per wall amp
- No brushes to replace
- Enclosed design protects internal motor components from dirt, dust and overspray to extend motor life

Chrome-Plated, Welded-Steel Hi-Boy Cart

- Hose rack with retractable handle
- Tilt-back cart design
- Lift handles provide convenient grab points
- Tubed pneumatic wheels roll easily on all surfaces



TexSpray Mark V



DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX LPM	MAX PSI
Mark V	249907	.037	4.7	3300

Comes complete with 9.5 m x 15 m hose, 6.4 mm x .9 m Whip Hose, HD Texture Gun, GHD 427 and 531 Tips



ProConnect, no-tools pump removal system.



Built-in kickstand for convenient bucket changes.



Airless spray skim coat in a Level 5 finish.

FinishPro 390

Air-Assisted Airless Sprayer

Introducing Graco's newest solution to fine finishing! The FinishPro 390 offers a high-quality fine finish at a high production rate.

True 2-in-1 Capability

- In the air-assisted airless mode the on-board air compressor assists the pump in producing a high quality fine finish at lower pressures
- Able to support up to a .020 tip in airless mode

Premium G40 Air-Assist Gun with RAC X™ SwitchTips™

- All new 'optimized' air cap utilizes 8 air passages to deliver air closer to the tip – resulting in a softer, more consistent pattern from start to finish
- Lightweight, compact design is ideal for getting into tight areas
- Ultra light trigger pull and form-fitted handle means less fatigue for the user
- Air adjustment valve conveniently located right at the gun
- Graco's fine finish tips provide a superior spray finish
- Reversible tips allow for easy clearing of clogged tips – no need to disassemble the gun
- Switching tips is simple – ideal when moving from trim to doors

Proven Endurance™ Pump

- Piston pump allows for consistent priming and pumping of even the heaviest materials
- Long-life V-Max Blue™ Packings, Chromex™ Rod and Stainless Steel Cylinder
- Proven design and rugged construction

Lightweight, Compact Design

- Welded, durable, chromed frame is light enough for one person to handle
- Retractable handle allows for easy movement and compact storage
- Hose wrap holds up to 30 m of air and fluid hose

Customized, Long-Life Air Compressor

- Quiet twin cylinder design
- Produces 3.2 cfm @ 35 psi



DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX LPM	MAX PSI
FinishPro 390	255116	0.021	1.8	2600

Includes: G40 Gun, 5.7 Liter suction tube, RAC X FFT210, LTX517, 4.8 mm x 15 m BlueMax™ II 3300-psi Hose, 9.5 mm x 15 m air hose



One-gallon direct suction tube is ideal for small jobs and touch-up work.



Simple, color-coded labels easily identify air-assisted mode.



Exclusive FlexCoil™ air hose design provides exceptional maneuverability and control at gun.

Graco's premier solution to fine finishing!
The FinishPro 395 offers a high-quality fine finish at a high production rate while handling the most challenging materials.

True 2-in-1 Capability

- In the air-assisted airless mode the on-board air compressor assists the pump in producing a high quality fine finish at lower pressures
- Able to support up to a .021 tip in airless mode

Premium G40 Air-Assist Gun with RAC X SwitchTips

- All new 'optimized' air cap utilizes 8 air passages to deliver air closer to the tip – resulting in a softer, more consistent pattern from start to finish
- Lightweight, compact design is ideal for getting into tight areas
 - Ultra light trigger pull and form-fitted handle means less fatigue for the user
 - Air adjustment valve conveniently located right at the gun
 - Graco's fine finish tips provide a superior spray finish
- Reversible tips allow for easy clearing of clogged tips – no need to disassemble the gun
- Switching tips is simple – ideal when moving from trim to doors

SmartControl 1.0 with Digital Display

- Microprocessor control delivers a consistent spray pattern without pressure fluctuations at all pressures
- Tight deadband and fast response when spraying
- Digital Display accurately displays spraying pressure

Proven Endurance Pump

- Piston pump allows for consistent priming and pumping of even the heaviest materials
- Long-life V-Max Blue Packings, Chromex Rod and Stainless Steel Cylinder
- Proven design and rugged construction

Customized, Long-Life Air Compressor

- Quiet twin cylinder design
- Produces 3.2 cfm @ 35 psi

FinishPro 395

Air-Assisted Airless Sprayer



DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX LPM	MAX PSI
FinishPro 395	255117	0.023	2.0	3300

Includes: G40 Gun, RAC X FFT210, LTX517, 4.8 mm x 15 m BlueMax II 3300 psi Hose, 9.5 mm x 15 m air hose



Microprocessor delivers the most consistent spray fan.



On-board air regulator and gauge allow for precise air control and repeatable finishes.



Exclusive FlexCoil air hose design provides exceptional maneuverability and control at gun.

New Contractor™ & FTx™ Guns

Exclusive New FlexSeal™ Design

Introducing breakthrough needle design technology that protects the needle from paint, preventing wear and gun spitting – making the New Contractor and FTx Guns our longest lasting, most reliable guns! You'll get the maximum performance, reliability and comfort that you've come to expect from Graco.

Exclusive FlexSeal™ Totally Enclosed Needle Design (patent-pending)

- Revolutionary needle design has no exposure to paint resulting in 70% longer life!
- Fluid pressure in the gun pushes on the FlexSeal to quickly shut-off needle.
- Needle is completely enclosed – paint no longer contacts the needle, reducing wear.



Consistent Needle Shut-Off

- Spring is outside of the fluid path to eliminate pack out and slow needle shut-off.

Ergonomic Gun Handle


- New Contractor gun's form-fitted handle maximizes operator control and comfort.

Durable Nickel Finish

- Premium nickel finish is corrosion resistant and easier to clean.


Reduced Gun Spitting

- Seat has been re-positioned closer to the tip, 60% "dead space" eliminated.
- Reduced amount of paint left between needle and tip for less spitting on next trigger pull.
- FlexSeal ensures quick shut-off.




Graco vs Other Industry-Standard Needle Designs

Graco's FlexSeal Totally Enclosed Needle Design

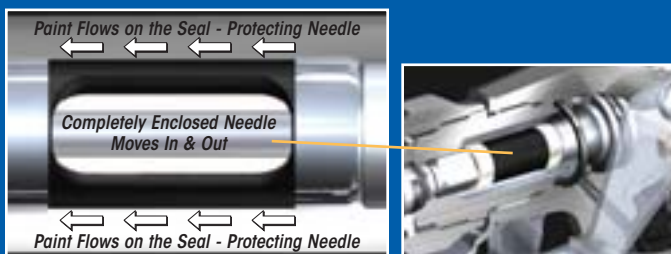

Needle is completely enclosed by the FlexSeal to provide consistent and quick shut-off, reducing spitting.

Other Industry Standard Gun Needle Designs

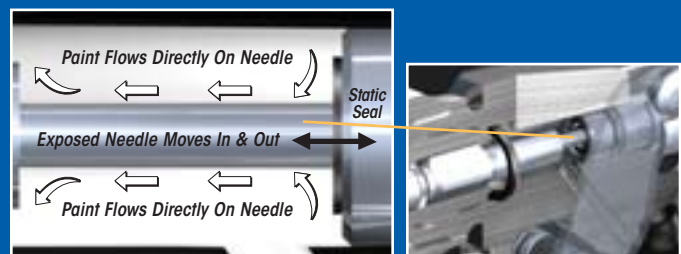

Paint flows directly on needle that moves in and out of a static seal – resulting in needle wear with every trigger pull.

Accessories

Essential Tools For Maximum Productivity and Performance

AIRLESS GUNS



288420
288425
288421
288430
288429
288431
246240
246468
287023
287024

New Contractor Gun (2-finger trigger) with RAC X 517 Tip and Guard
New Contractor Gun (4-finger trigger) with RAC X 517 Tip and Guard
New Contractor Gun (2-finger trigger) with RAC 5 517 Tip and Guard
New FTx Gun (4-finger trigger) with RAC X 515 Tip and Guard
New FTx Gun (2-finger trigger) with RAC X 515 Tip and Guard
New FTx Gun (4-finger trigger) with RAC 5 515 Tip and Guard
 Silver Plus™ Gun with RAC X 517 Tip and Guard
 Flex Plus™ Gun with RAC X 517 Tip and Guard
 .9 m Pole Gun with Contractor Inline valve, CleanShot™ valve, RAC X Tip and Guard
 1.8 m Pole Gun with Contractor Inline valve, CleanShot valve, RAC X Tip and Guard

GUN HOSE KITS



288489
288496
288490
288493
288497
287095
287041
287042
287043

Kits include the following unless otherwise noted: Airless Gun, RAC X 517 Tip and Guard, 6.4 mm x 15 m BlueMax II 3300 psi Airless Hose and .9 m Whip Hose.

New Contractor Gun Hose Kit
New Contractor Gun Hose Kit with RAC 5
New Contractor Gun Hose Kit with 9.5 mm x 15 m BlueMax II 3300 psi Airless Hose
New FTx Gun Hose Kit RAC X 515 Tip, No Whip Hose
New FTx Gun Hose Kit with RAC 5 - 515 Tip, No Whip Hose
 Flex Plus Gun Hose Kit
 Silver Plus Gun Hose Kit
 Silver Plus Gun Hose Kit with 9.5 mm x 15 m BlueMax II 3300 psi Airless Hose
 Silver Plus Gun Hose Kit with 9.5 mm x 15 m BlueMax II 4000 psi Airless Hose

BLUEMAX II AIRLESS HOSE



238358
238959
240793
240794
240797

Feel the Difference in Flexibility

4.8 mm x 0.9 m BlueMax II 3300 psi Airless Whip Hose
 4.8 mm x 1.4 m BlueMax II 3300 psi Airless Whip Hose
 6.4 mm x 7.5 m BlueMax II 3300 psi Airless Hose
 6.4 mm x 15 m BlueMax II 3300 psi Airless Hose
 9.5 mm x 15 m BlueMax II 3300 psi Airless Hose

FLUIDS



243103
245133

206994
206995
206996

Pump Armor™ - 1 Liter
 Pump Armor - 3.8 Liter
 Use Graco's exclusive Pump Armor for long term pump storage to prohibit harmful rust and corrosion.
 Throat Seal Liquid (TSL™) - .24 Liter
 Throat Seal Liquid (TSL) - 1 Liter
 Throat Seal Liquid (TSL) - 3.8 Liter
 Prolong the life of your pump by routinely adding TSL to your pump's wet cup.

PRESSURE ROLLERS



245397
244279
244281

EvenFlow™ Pressure Roller Assembly with 50 cm fixed heavy duty extension and connector inline valve
 EvenFlow Pressure Roller Assembly with 50 cm fixed heavy duty extension, 45° angle
 EvenFlow Pressure Roller Assembly with 46 cm - 91 cm telescoping extension

Ask your local authorized Graco distributor for details on Graco's complete line of airless accessories.

RAC X SwitchTips™

RAC X SwitchTips are the highest performing and longest lasting tips in the industry! RAC X is designed to maintain a wider spray pattern for a longer period of time. A wider spray fan means fewer passes with the gun and better productivity.



Best Tip on the Market (Blue Handle)

- Longest lasting fan pattern
- Highest quality finish with a consistent spray pattern
- Available in the most common tip sizes

Easy to Identify Tip Size

- Large raised tip size numbers are always legible - even when covered with paint

Superior Tip Design

- Locking tab ensures tip stays securely in guard
- "Snaps" tip in spray or reverse position
- OneSeal™ tip installs with no tools
- Solvent seal available when using extremely hot solvents

Improved Diffuser Design

- No obstructions for better spray patterns of most fluids
- Easier to clean

RAC X – Fine Finish (Green Handle)

- Pre-orifice design improves the overall finish quality with finer atomization and soft edges for overlapping
- Can spray at lower pressures
- Pre-orifice and diffuser design easier to clean and less likely to plug
- Also includes solvent seal for extremely hot solvents

RAC X - WideRAC (Blue Handle)

- The WideRAC covers double the area in half the time - increased flow rate ensures the proper mil build
- WideRAC tips are made for high production, new construction applications which may require larger airless sprayers

DESCRIPTION	PART NUMBER	APPLICATIONS	MATERIALS
RAC X	LTXxxx	Residential, Commercial or Industrial	Lacquers to Mastics
WideRAC™	WRxxxx	High Production, New Construction	Lacquers to Mastics
Fine Finish	FFTxxx	Metal, Woodwork	Lacquer, Varnish, Stain Enamel, Oil base paint



WideRAC Tips - complete jobs in half the time. Extra wide pattern, 61 cm (24 in) (WRxxxx)



Fine Finish Tips - pre-orifice produces finer atomization and softer edges. Highest quality finish (FFTxxx)



RAC X HandTite Tip Guard - 22 mm (7/8 in) thread size (246215)

Tip Charts

RAC X SwitchTips (LTXxxx)



ORIFICE SIZE - INCHES

IN (MM)	ORIFICE SIZE - INCHES													
	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035
2-4 (51-102)														
4-6 (102-152)	209	211	213	215	217	219								
6-8 (152-203)	309	311	313	315	317	319	321							
8-10 (203-254)		411	413	415	417	419	421	423						
10-12 (254-305)		511	513	515	517	519	521	523	525	527		531		535
12-14 (305-356)				615	617	619	621	623	625	627	629	631		635
14-16 (356-406)							721							
Flow Rate (gpm)	.09	.12	.18	.24	.31	.38	.47	.57	.67	.77	.90	1.03	1.17	1.31
Flow Rate (lpm)	.33	.49	.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98

Water @ 2000 psi (138 bar, 13.8 MPa) - paints with a higher viscosity will decrease the flow rate
Example: for a tip with a .015 orifice and a 6 in (152 mm) pattern, order LTX315

WideRAC RAC X SwitchTips (WRxxxx)



ORIFICE SIZE - INCHES

IN (MM)	ORIFICE SIZE - INCHES									
	.021	.023	.025	.027	.029	.031	.033	.035	.037	.039
24 (610)	1221	1223	1225	1227	1229	1231	1233	1235	1237	1239
Flow Rate (gpm)	.47	.57	.67	.77	.90	1.03	1.17	1.31	1.47	1.63
Flow Rate (lpm)	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	5.56	6.18

Water @ 2000 psi (138 bar, 13.8 MPa) - paints with a higher viscosity will decrease the flow rate
Example: for a tip with a .027 orifice and a 24 in (610 mm) pattern, order WR1227

Fine Finish RAC X SwitchTips (FFTxxx)



ORIFICE SIZE - INCHES

IN (MM)	ORIFICE SIZE - INCHES			
	.008	.010	.012	.014
4-6 (102-152)	208	210	212	214
6-8 (152-203)	308	310	312	314
8-10 (203-254)		410	412	414
10-12 (254-305)		510	512	514
12-14 (305-356)			612	614
Flow Rate (gpm)	.07	.11	.15	.21
Flow Rate (lpm)	.26	.41	.59	.80

Water @ 2000 psi (138 bar, 13.8 MPa) - paints with a higher viscosity will decrease the flow rate
Example: for a tip with a .010 orifice and a 8 in (203 mm) pattern, order FFT410

RAC 5 SwitchTips (286xxx)



ORIFICE SIZE - INCHES

IN (MM)	ORIFICE SIZE - INCHES																						
	.007	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.039	.043	.045	.051	.055	.063	.065	
2-4 (51-102)		109	111	113	115		119	121															
4-6 (102-152)	207	209	211	213	215	217	219	221	223	225					235								
6-8 (152-203)	307	309	311	313	315	317	319	321	323	325	327		331										
8-10 (203-254)		409	411	413	415	417	419	421	423	425	427	429		433	435	439	443		451	455			
10-12 (254-305)		509	511	513	515	517	519	521	523	525	527	529	531	533	535		543		551	555	563		
12-14 (305-356)		609	611	613	615	617	619	621	623	625	627	629	631	633	635	635	645						
14-16 (356-406)							619	621	623	625	627	629	631	633	635	635							
16-18 (406-457)					815	817	819	821			827		831	833	835	835							
18-20 (457-508)						917									935								
Flow Rate (gpm)	.05	.09	.12	.18	.24	.31	.38	.47	.57	.67	.77	.90	1.03	1.17	1.31	1.63	1.98	2.17	2.79	3.25	4.26	4.53	
Flow Rate (lpm)	.20	.33	.49	.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	6.18	7.51	8.23	10.57	12.29	16.13	17.17	

Water @ 2000 psi (138 bar, 13.8 MPa) - paints with a higher viscosity will decrease the flow rate
Example: for a tip with a .011 orifice and a 6 in (152 mm) pattern, order 286311

Contractor Flat Tips (269xxx)



ORIFICE SIZE - INCHES

IN (MM)	ORIFICE SIZE - INCHES											
	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.035
4-6 (102-152)	211	213	215	217	219		225	227				
6-8 (152-203)	311	313	315	317	319	321	323	325	327			
8-10 (203-254)	411	413	415	417	419	421	423	425	427			435
10-12 (254-305)	511	513	515	517	519	521	523	525	527		531	
12-14 (305-356)		613	615	617	619	621	623	625	627		631	635
14-16 (356-406)			715	717	719	721		725				
16-18 (406-457)			815		819	821			827	829	831	
18-20 (457-508)							925					
Flow Rate (gpm)	.12	.18	.24	.31	.38	.47	.57	.67	.74	.90	1.03	1.31
Flow Rate (lpm)	.49	.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.98

Water @ 2000 psi (138 bar, 13.8 MPa) - paints with a higher viscosity will decrease the flow rate
Example: for a tip with a 0.011 in orifice and a 10 in (254 mm) pattern, order 269511

Accessories

Genuine Graco — The Key to Ultimate Flexibility and Superior Output

ACCESSORIES FOR 390 THRU 595




HOPPER

288526

Hopper Accessory

5.7 Liter molded hopper attaches to sprayer in place of inlet suction hose without tools. Ideal for spraying small amounts of material. Lid included. Smooth inside cleans up fast. Now works with Stand, Hi-Boy and Lo-Boy units.

FILTERS AND STRAINERS



246425

Easy Out Filters, Short, Gray, 30 mesh

246384

Easy Out Filters, Short, Black, 60 mesh

246382

Easy Out Filters, Short, Blue, 100 mesh

246383

Easy Out Filters, Short, Red, 200 mesh

246385

Inlet Strainer

ACCESSORIES FOR 695 THRU 1095


SUCTION HOSE KITS

248317

208 Liter Suction Hose Kit

Easily installs on any sprayer to provide the convenience of a flexible inlet hose. Leave tube long (fits 114 Liter trash cans and 208 Liter drums) or simply unscrew at middle fitting to shorten (fits 18.9 Liter buckets).

FILTERS AND STRAINERS



244071

Easy Out Filters, Long, Gray, 30 mesh

244067

Easy Out Filters, Long, Black, 60 mesh

244068

Easy Out Filters, Long, Blue, 100 mesh

244069

Easy Out Filters, Long, Red, 200 mesh

189920

Inlet Strainer

Ask your local authorized Graco distributor for details on Graco's complete line of airless accessories.

Warranty

We stand behind every piece of equipment we manufacture with one of the industries strongest warranties. Spray with the confidence that you will probably never need to use Graco's warranty, but if you do... we will be there.



Lifetime Electric Motor Warranty

If the Motor fails under normal use, we'll replace it under warranty for the original owner for the life of the sprayer.

Lifetime Drive Warranty

If the Drive Train fails from normal use, we'll replace it under warranty for the original owner for the life of the sprayer.

2-Year Warranty

Coverage against defects in materials and workmanship on the entire sprayer.

Convenient Service

Graco offers many authorized distributor locations in Australia/New Zealand for service and repair

Electric Product Specifications



390

Max Tip: .021
Max psi: 3300
Max lpm: 1.8
Weight kg: 13.6 Stand
Motor hp: 5/8 hp DC
Max Ext. Cord Support:

- Up to 90 m of Min. 14 gauge 3-wire extension cord

Generator Requirements:

- 3000W

Gun:

- FTx Airless Gun

Hose:

- 6.4 mm x 15 m BlueMax II 3300 psi

Tip:

- RAC X 515 Tip and Guard

Inlet Strainer:

- Part #246385

Pump Filter:

- Includes Easy Out Pump Filter

Easy Out Filter Screens:

- 30 Mesh - 246425
- 60 Mesh - 246384
- 100 Mesh - 246382
- 200 Mesh - 246383

Sprayer Dimensions:

- Stand - 19"x18"x16"
- Hi-Boy - NA
- Lo-Boy - NA

Wear Parts:

- Packing Kit - 244194
- Rod - 249125
- Cylinder - 243176

Complete Pump Lower:

- Part #249127

Manuals:

- Operation - 310820
- Repair - 310824
- Pump - 309250
- Gun - 309639
- Parts List - 310876



Ultra 395

Max Tip: .023
Max psi: 3300
Max lpm: 2.0
Weight kg: 19 Stand
Motor hp: 7/8 hp TEFC DC
Max Ext. Cord Support:

- Up to 90 m of Min. 14 gauge 3-wire extension cord

Generator Requirements:

- 3000W

Gun:

- FTx Airless Gun

Hose:

- 6.4 mm x 15 m BlueMax II 3300 psi

Tip:

- RAC X 515 Tip and Guard

Inlet Strainer:

- Part #246385

Pump Filter:

- Includes Easy Out Pump Filter

Easy Out Filter Screens:

- 30 Mesh - 246425
- 60 Mesh - 246384
- 100 Mesh - 246382
- 200 Mesh - 246383

Sprayer Dimensions:

- Stand - 19"x18"x16"
- Hi-Boy - N/A
- Lo-Boy - N/A

Wear Parts:

- Packing Kit - 244194
- Rod - 249125
- Cylinder - 243176

Complete Pump Lower:

- Part #246428

Manuals:

- Operation - 309665
- Repair - 309674
- Pump - 309250
- Gun - 309639
- Parts List - 309675



Ultra Max II 490

Max Tip: .023
Max psi: 3300
Max lpm: 2.0
Weight kg: 15 Stand
Motor hp: 1 hp Brushless DC
Max Ext. Cord Support:

- Up to 90 m of Min. 14 gauge 3-wire extension cord

Generator Requirements:

- 3000W

Gun:

- FTx Airless Gun

Hose:

- 6.4 mm x 15 m BlueMax II 3300 psi

Tip:

- RAC X 515 Tip and Guard

Inlet Strainer:

- Part #246385

Pump Filter:

- Includes Easy Out Pump Filter

Easy Out Filter Screens:

- 30 Mesh- 246425
- 60 Mesh- 246384
- 100 Mesh- 246382
- 200 Mesh- 246383

Sprayer Dimensions:

- Stand- 19"x18"x16"
- Hi-Boy- N/A
- Lo-Boy- N/A

Wear Parts:

- Packing Kit- 244194
- Rod- 249125
- Cylinder- 243176

Complete Pump Lower:

- Part #246428

Manuals:

- Operation- 309665
- Repair- 309674
- Pump- 309250
- Gun- 309639
- Parts List- 309675



Ultra Max II 495

Max Tip: .025
Max psi: 3300
Max lpm: 2.3
Weight kg: 19.5 Stand
Motor hp: 1.2 hp Brushless DC
Max Ext. Cord Support:

- Up to 90 m of Min. 14 gauge 3-wire extension cord

Generator Requirements:

- 3000W

Gun:

- FTx Airless Gun

Hose:

- 6.4 mm x 15 m BlueMax II 3300 psi

Tip:

- RAC X 515 Tip and Guard

Inlet Strainer:

- Part #246385

Pump Filter:

- Includes Easy Out Pump Filter

Easy Out Filter Screens:

- 30 Mesh- 246425
- 60 Mesh- 246384
- 100 Mesh- 246382
- 200 Mesh- 246383

Sprayer Dimensions:

- Stand- 16"x14"x19"
- Hi-Boy- 30"x25"x26"
- Lo-Boy- 26"x14"x21"

Wear Parts:

- Packing Kit- 244194
- Rod- 249125
- Cylinder- 243176

Complete Pump Lower:

- Part #246428

Manuals:

- Operation- 309665
- Repair- 309674
- Pump- 309250
- Gun- 309639
- Parts List- 309675



Ultra Max II 595

Max Tip: .027
Max psi: 3300
Max lpm: 2.6
Weight kg: 32.7 Hi-Boy
Motor hp: 1.4 hp Brushless DC
Max Ext. Cord Support:

- Up to 90 m of Min. 14 gauge 3-wire extension cord

Generator Requirements:

- 3000W

Gun:

- FTx Airless Gun

Hose:

- 6.4 mm x 15 m BlueMax II 3300 psi

Tip:

- RAC X 515 Tip and Guard

Inlet Strainer:

- Part #246385

Pump Filter:

- Includes Easy Out Pump Filter

Easy Out Filter Screens:

- 30 Mesh- 246425
- 60 Mesh- 246384
- 100 Mesh- 246382
- 200 Mesh- 246383

Sprayer Dimensions:

- NA
- Hi-Boy- 30"x25"x26"
- Lo-Boy- 26"x14"x21"

Wear Parts:

- Packing Kit- 244194
- Rod- 249125
- Cylinder- 243176

Complete Pump Lower:

- Part #246428

Manuals:

- Operation- 309665
- Repair- 309674
- Pump- 309250
- Gun- 309639
- Parts List- 309675

Electric Product Specifications



Ultra Max II 695

- Max Tip:** .029
Max psi: 3300
Max lpm: 3.0
Weight kg: 42 Hi-Boy
Motor hp: 1.75 hp Brushless DC
Max Ext. Cord Support:
 - Up to 90 m of Min. 12 gauge 3-wire extension cord**Generator Requirements:**
 - 5000W**Includes:**
 - Premium includes: Digital Display, AutoClean2, Tool Box, Contractor Gun, RAC X 517 Tip & Guard, 6.4 mm x 15 m BlueMax II Airless Hose**Inlet Strainer:**
 - Part #189920**Pump Filter:**
 - Includes Easy Out Pump Filter**Easy Out Filter Screens:**
 - 30 Mesh- 244071
 - 60 Mesh- 244067
 - 100 Mesh- 244068
 - 200 Mesh- 244069**Sprayer Dimensions:**
 - Hi-Boy- 92 x 66 x 76 cm
 - Lo-Boy- 66 x 36 x 53 cm**Wear Parts:**
 - Packing Kit- 248212
 - Rod- 248206
 - Sleeve- 248209**Complete Pump Lower:**
 - Part #248204**Manuals:**
 - Operation- 311360
 - Repair- 311365
 - Pump- 310643
 - Gun- 309639
 - Parts List- 311362



Ultra Max II 795

- Max Tip:** .031
Max psi: 3300
Max lpm: 3.6
Weight kg: 42 Hi-Boy
Motor hp: 2.0 hp Brushless DC
Max Ext. Cord Support:
 - Up to 90 m of Min. 12 gauge 3-wire extension cord**Generator Requirements:**
 - 5000W**Includes:**
 - Premium includes: Digital Display, AutoClean2, Tool Box, Contractor Gun, RAC X 517 Tip & Guard, 6.4 mm x 15 m BlueMax II Airless Hose**Inlet Strainer:**
 - Part #189920**Pump Filter:**
 - Includes Easy Out Pump Filter**Easy Out Filter Screens:**
 - 30 Mesh- 244071
 - 60 Mesh- 244067
 - 100 Mesh- 244068
 - 200 Mesh- 244069**Sprayer Dimensions:**
 - Hi-Boy- 92 x 66 x 76 cm
 - Lo-Boy- 66 x 36 x 53 cm**Wear Parts:**
 - Packing Kit- 248212
 - Rod- 248206
 - Sleeve- 248209**Complete Pump Lower:**
 - Part #248204**Manuals:**
 - Operation- 311360
 - Repair- 311365
 - Pump- 310643
 - Gun- 309639
 - Parts List- 311362



Ultra Max II 1095

- Max Tip:** .033
Max psi: 3300
Max lpm: 4.1
Weight kg: 55 Hi-Boy
Motor hp: 2.2 hp Brushless DC
Max Ext. Cord Support:
 - Up to 90 m of Min. 12 gauge 3-wire extension cord**Generator Requirements:**
 - 5000W**Includes:**
 - Premium includes: Digital Display, AutoClean2, Tool Box, Contractor Gun, RAC X 517 Tip & Guard, 6.4 mm x 15 m BlueMax II Airless Hose**Inlet Strainer:**
 - Part #189920**Pump Filter:**
 - Includes Easy Out Pump Filter**Easy Out Filter Screens:**
 - 30 Mesh- 244071
 - 60 Mesh- 244067
 - 100 Mesh- 244068
 - 200 Mesh- 244069**Sprayer Dimensions:**
 - Hi-Boy- 97 x 76 x 64 cm**Wear Parts:**
 - Packing Kit- 248213
 - Rod- 248207
 - Sleeve- 248210**Complete Pump Lower:**
 - Part #287513**Manuals:**
 - Operation- 311360
 - Repair- 311365
 - Pump- 310894
 - Gun- 309639
 - Parts List- 311362



TexSpray Mark V

- Tips/Discs Supplied with Trigger Gun:**
 - 427 and 531 Reversible Spray Tips**Max Working Pressure:**
 - 3300 psi**Max Delivery Rating:**
 - 4.7 Lpm**Max Tip:** .037
Max Hose*: 90 m
Motor hp:
 - Industrial Grade 2.5 hp, DC**Compressor Air Output:**
 - User supplied air compressor and optional Air Atomizer Kit required for some texture finishes**Weight kg:** 55
Sprayer Dimensions:
 - 56 W x 62 L x 81 H (cm)**Manuals:**
 - Operation - 311360
 - Repair - 311365 / 311362**Materials Sprayed:**
 - Oil-based coatings, enamels, latex, blockfillers, elastomers, epoxies, drywall mud and other high-build materials**Typical Applications:**
 - Medium to large residential and commercial interior and exterior



FinishPro 390

- Max Tip:** .021
Max psi: 2600
Max lpm: 1.8
Pump Motor hp: 5/8 hp DC
Compressor Motor hp: 1 hp AC
Compressor Air Output:
 - 3.2 cfm @ 35 psi**Weight kg:** 35
Max Ext. Cord Support:
 - Up to 90 m of Min. 14 gauge 3-wire extension cord**Gun:**
 - G40 Air-Assisted Gun**Hose (Bonded):**
 - 4.8 mm x 15 m BlueMax II 3300
 - 9.5 mm x 15 m air hose**Tips:**
 - RAC X FFT210, LTX517**Inlet Strainer:**
 - Part #246385**Pump Filter:**
 - 100 mesh Easy Out filter**Sprayer Dimensions (WLH):**
 - Lo-Boy - 56 x 71 x 64 cm**Wear Parts:**
 - Packing Kit - 244194
 - Rod - 249125
 - Cylinder - 243176**Complete Pump Lower:**
 - Part #249127**Manuals:**
 - Operation - 311905
 - Repair - 311911
 - Pump - 309250
 - Gun - 311937



FinishPro 395

- Max Tip:** .023
Max psi: 3300
Max lpm: 2.0
Pump Motor hp: 7/8 hp TEFC DC
Compressor Motor hp: 1 hp AC
Compressor Air Output:
 - 3.2 cfm @ 35 psi**Weight kg:** 43
Max Ext. Cord Support:
 - Up to 90 m of Min. 14 gauge 3-wire extension cord**Gun:**
 - G40 Air-Assisted Gun**Hose (Bonded):**
 - 4.8 mm x 15 m BlueMax II 3300 psi
 - 9.5 mm x 15 m air hose**Tips:**
 - RAC X FFT210, LTX517**Inlet Strainer:**
 - Part #246385**Pump Filter:**
 - 100 mesh Easy Out filter**Sprayer Dimensions (WLH):**
 - Hi-Boy - 58 x 71 x 8 cm**Wear Parts:**
 - Packing Kit - 244194
 - Rod - 249125
 - Cylinder - 243176**Complete Pump Lower:**
 - Part #246428**Manuals:**
 - Operation - 311905
 - Repair - 311911
 - Pump - 309250
 - Gun - 311937

* Hose length is heavily dependent on material viscosity



ABOUT GRACO

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

CONTACT

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612.623.6000
Fax: 612.623.6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco N.V.
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32.89.770.700
Fax: 32.89.770.777

ASIA PACIFIC

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81.45.593.7300
Fax: 81.45.593.7301

ASIA PACIFIC

CHINA

Graco Hong Kong Ltd.
Representative Office
Room 118 1st Floor
No.2 Xin Yuan Building
No.509 Cao Bao Road
Shanghai, P.R. China 200233
Tel: 86.21.649.50088
Fax: 86.21.649.50077

ASIA PACIFIC

KOREA

Graco Korea Inc.
Choheung Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-Si, Gyunggi-Do,
Korea 431-060
Tel: 82(Korea).31.476.9400
Fax: 82(Korea).31.476.9801

SALES/DISTRIBUTION/SERVICE

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco Inc. is registered to I.S. EN ISO 9001

North America
800-690-2894
FAX 800-334-6955
WWW.GRACO.COM

GRACO INC.
P.O. Box 1441
Minneapolis, MN 55440-1441

©2006 Graco Inc. 337659 Rev. B 1/07 Printed in U.S.A.

All other brand names or marks are used for identification purposes and are trademarks of their respective owners. Blue is a trademark of Graco Inc. for Contractor Equipment Sprayers.