



GB

01

ROTARY SCREW COMPRESSORS



⇒ L160 – L250

INTELLIGENT AIR TECHNOLOGY

The CompAir L160-L250 Series
A high capacity air compressor
range that sets the highest
standards in reliable, economical
and efficient operation.

EXCEPTIONAL DESIGN - SUPERIOR EFFICIENCY

The CompAir range of oil-injected rotary screw compressors incorporates the very latest technological advances and manufacturing processes to provide users with a continuous supply of economical, reliable, high quality compressed air.

Screw compression elements are manufactured in-house using the latest CNC rotor grinding machinery, coupled with on-line laser technology, in order to maintain precise

THERMOSTATICALLY CONTROLLED MOTOR 
DRIVEN COOLING FAN

Cold air passes over the inside of the compressor picking up radiant heat so there is no temperature build-up under the canopy.

Safe operation in the most arduous conditions.

Additional fans are not normally required when exhaust ducting is installed, reducing installation and operating costs.

A LARGE SURFACE AFTER-COOLER 

Optimum cooling to ensure low operating and discharge temperatures.

All areas are easily accessible for maintenance and inspection.

Less water vapor in the compressed air leading to longer life for downstream components.

A LARGE OIL COOLER 

Low system temperatures, resulting in longer life for oil, filters and seals.

Lower pressure drop and improved efficiency.

BUILT-IN INTELLIGENT CONTROLS 

All CompAir rotary screw compressors are supplied with intelligent, fully electronic controllers with efficient monitoring and user-friendly menu.



REGULATED SPEED ROTARY SCREW COMPRESSORS

The RS drive system enables the compressor to match output to varying demands and as a result provide energy savings. Adding a regulated speed compressor to any installation of standard compressors gives the entire system the ability to precisely match output to demand, allowing the compressors to consume exactly the right amount of energy to do the job, and no more.

manufacturing tolerances. The resulting reliability and performance ensure that operating costs will remain low throughout the compressor's life.

Industries, both large and small, rely on CompAir rotary screw compressors for a supply of consistently high quality compressed air. The 160 to 250kW range covers compressor outputs from 21.3 to 42.7m³/min over a pressure range between 5 to 13 bar, and are available in both air and water-cooled models.

FEATURES	BENEFITS
High efficiency airend	<ul style="list-style-type: none"> • Reduces power cost • High free air delivery • Highest reliability • Slow rotational speed
High efficiency IP55 EFF1 motor	<ul style="list-style-type: none"> • Reduces energy consumption • High level of protection
Automatic motor lubrication system	<ul style="list-style-type: none"> • Long bearing life • Zero maintenance
DEL COS 3100 controller	<ul style="list-style-type: none"> • Easy to use • Protects your compressor • Ensures safe operation • Ability to control other compressors • Instant monitoring and control
Compact design	<ul style="list-style-type: none"> • Low installation costs • Transportable by fork lift • Simplifies maintenance • Simple connection for compressed air and electrical supply • Easy commissioning • Configured for connection to ducting systems
ASSURE™ Warranty	<ul style="list-style-type: none"> • Total piece of mind

➤ **LOW SERVICE COSTS**

The innovative compressor design saves unnecessary service costs. All component parts are designed for a long service life and the generously-sized suction filters, oil filters and fine separators ensure excellent compressed air quality. Quick access service points allow servicing to be conducted with the minimum downtime and service costs.

➤ **LOW NOISE LEVELS**


The sound insulation and compressor design reduces noise to low levels.

➤ **HIGH PERFORMANCE SEPARATOR FILTER**

Two stage filtration ensures highest quality air is delivered to your system < 3ppm oil carryover.


➤ **PREMIUM EFFICIENCY AIREND**

The high output compression element, with slow rotational speed reduces energy costs and ensures external hoses are reduced to a minimum, to guarantee the highest levels of quality and reliability are achieved.

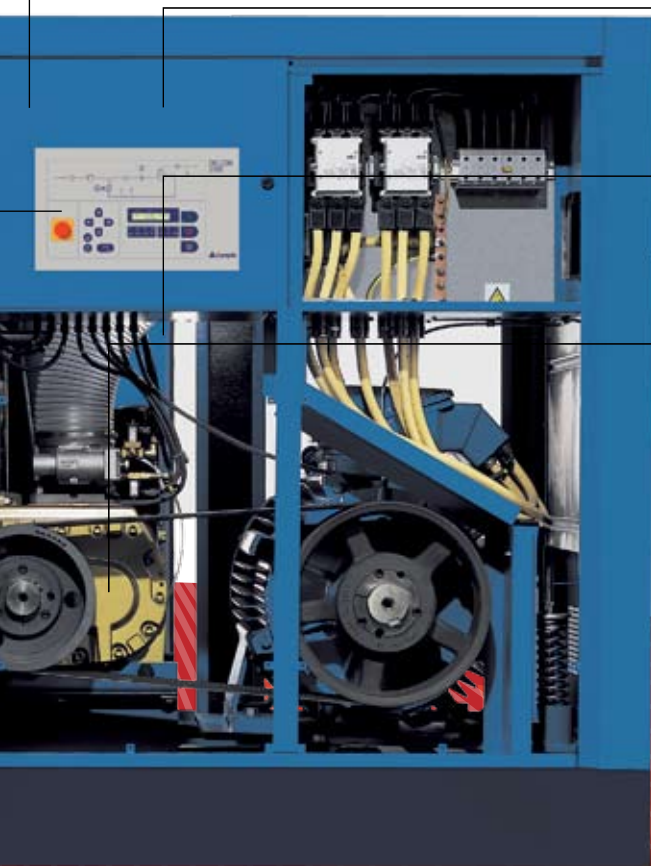

⇒ DELCOS 3100 INTELLIGENT CONTROLLER

The DELCOS control system ensures reliable operation and protects your investment by continuously monitoring the operational parameters, which is essential to reducing your running costs.



The Delcos 3100 also has the capability to have programmable inputs and outputs, control additional equipment as well as providing the following features with a clear readable text.

- Discharge / Line pressure display
- Air/ Oil temperature display
- Total hours run and loaded hours
- Service due indicator
- Fault log monitor
- Remote stop start
- Auto restart on power failure
- Status Indication
- RS485 – Modbus RTU

⇒ TECHNICAL SPECIFICATIONS

MODEL*	Drive Motor kW	Free Air Delivered (m ³ /min)**			Dimensions (mm)			Noise level*** dB (A)	Weight kg
		7.5 bar g	10 bar g	13 bar g	Length	Width	Height		
L160	160	28.4	25.1	21.3	2800	1920	2073	76	4060
L200	200	36.6	31.0	27.2	2800	1920	2073	78	4500
L250	250	42.7	38.0	33.2	2800	1920	2073	78	5030
L160 RS	160	9.88 - 27.55	9.78 - 24.35	8.60 - 20.70	3579	1920	2073	81	4900
L200 RS	200	9.64 - 35.50	9.74 - 30.07	9.20 - 26.40	3579	1920	2073	82	5400
L250 RS	250	10.30 - 41.40	10.12 - 36.86	9.95 - 32.32	3579	1920	2073	82	5550

* Water cooled models available

** Data measured and stated in accordance with ISO 1217 Annex C and Pneurop / Cagi PN2CPTC2 and the following conditions:
Air Intake Pressure 1 bar a
Air Intake Temperature 20 °C
Humidity 0 % (Dry)

*** Measured in free field conditions in accordance with the Pneurop / Cagi PN8TNC2.2 test code, + / - 3 dB

⇒ ALL AROUND PROTECTION ASSURE™ EXTENDED WARRANTY FREE OF CHARGE

The new CompAir Assure™ Warranty is the first of its kind in the world, based on a 'working when you are' approach instead of the yearly based industry standard warranty. CompAir Comprehensive Service and Warranty Programmes (based on product usage up to 44,000 hours).

ASSURE™

24,000 hour extended warranty for new machines.

ASSURE™ EXTENSION

Extension of the standard 24,000 hour warranty up to 32,000 hours.

ASSURE™ RE-WARRANT


Re-Warranting of machines up to 28,000 hours which are not presently covered by warranty.

ASSURE™ PLUS

44,000 hour extended warranty for machines which run more than 5,000 hours annually.



CompAir policy is one of continuous improvement and we therefore reserve the right to alter specifications and prices without prior notice. All products are sold subject to the Company's conditions of sale.



www.compair.com sales@compair.com

INTELLIGENT AIR TECHNOLOGY