


PCWI PosiTest DFT Coating Thickness Gauge



Copyright 2016 Burwell Technologies



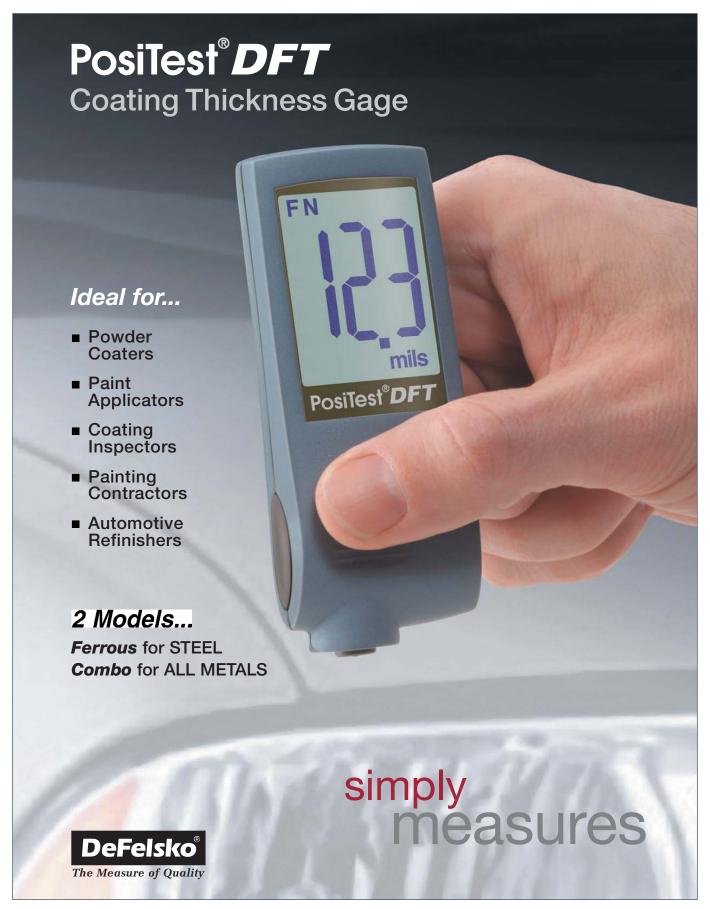

- Fast, repeatable measurements
- No calibration required for most applications
- ZERO feature for rough or curved surfaces
- Handy RESET feature when no zero reference is available
- Strong, wear-resistant, ruby-tipped probe
- Unique FLIP Display enables right-side-up viewing in any position
- Audible and visible measurement indication
- V-groove in probe for positioning on cylindrical parts
- Mils/Microns switchable

■ Basic instructions on the back of each gage

■ Built-in wrist strap for added convenience and safety

2 Year Warranty



Unique FLIP Display enables right-side-up viewing in any position

Specifications

Measurement Range	0 – 40 mils	0 – 1000 μm
Accuracy	±(0.1 mils + 3%)	±(2μm + 3%)
Size	4 x 1.5 x 0.9 in.	100 x 38 x 23 mm
Weight	2.5 oz.	70 g



Conforms to: ISO 2178/2360/2808,

prEN ISO 19840, ASTM B244/B499/B659/D1186/D1400/D7091/E376/G12, BS3900-C5, SSPC-PA2 and others. Certificate of Calibration traceable to NIST available.

© DeFelsko Corporation USA 2008. All Rights Reserved. Technical Data subject to change without notice. U.S. Patent # Re.35,703 • Printed in U.S.A. PDFT.v.LW/W0804



DeFelsko Corporation • 802 Proctor Ave., P.O. Box 676, Ogdensburg, NY 13669 USA Toll Free: 1-800-448-3835 • Phone: 315-393-4450 • FAX: 315-393-8471 techsale@defelsko.com • www.defelsko.com

