

ScaffLite Sheeting

Flame Retardant & Non-Flame Retardant

Base Fabric

3 x 3 sq. inch split yarns with 2400 denier scrim reinforced, laminated polyethylene sheeting.

Eyelet Band Fabric

14 x 14 sq. inch woven coated polyethylene with pre-set eyelet holes approximately every 4" inches on centre.

Roll Sizes/Styles

2m High x 45m Long 240gsm Flame Retardant
 2m High x 45m Long 240gsm Non-Flame Retardant
 4m High x 45m Long 240gsm Flame Retardant
 4m High x 45m Long 240gsm Non-Flame Retardant


2m High x 45m Long 180gsm Flame Retardant
 4m High x 45m Long 180gsm Flame Retardant

Specifications


Nominal Weight	7.4 oz./sq. yd
Nominal Thickness (Fabric)	10 mil
Nominal Thickness (Eyelet Band)	26 mil
U.V. Resistance	5% U.V. Treatment
Mullen Burst Strength	186 psi
Hydrostatic Resistance	71 psi
Tensile Strength	101 lbs (length) 87 lbs (width)
Tear Strength	35 lbs (length) 24 lbs (width)
Elongation	12% (length) 15% (width)

Fire Retardant

FR and NON-FR available

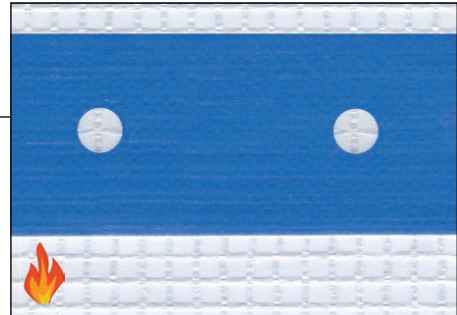

Fire Retardant Version

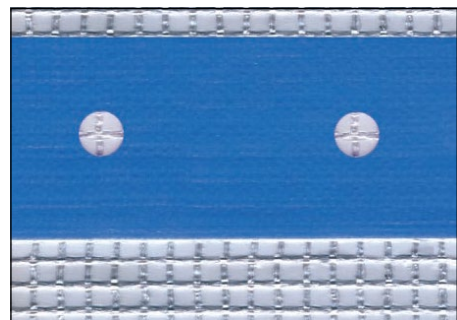

Non-Fire Retardant Version